

# LazerLine!™

## QCE660BVM 75 Ohm Coaxial Cable Drop Cable

### PRODUCT DESCRIPTION:

BONDED LAMINATED ALUMINUM TAPE, 60% BRAID, PVC JACKET, 0.051" MESSENGER

#### CENTER CONDUCTOR:

18 AWG COPPER-CLAD STEEL  
NOMINAL DIAMETER: 0.040" (1.02 mm)

#### DIELECTRIC:

GAS EXPANDED POLYETHYLENE  
NOMINAL DIAMETER OVER DIELECTRIC: 0.180" (4.57 mm)

#### SHIELD:

1<sup>ST</sup> SHIELD: LAMINATED ALUMINUM TAPE BONDED TO THE DIELECTRIC  
NOMINAL DIAMETER OVER TAPE: 0.187" (4.75 mm)

2<sup>ND</sup> SHIELD: 34 AWG ALUMINUM BRAID WIRE  
60% COVERAGE

#### JACKET:

PVC  
NOMINAL DIAMETER OVER JACKET: 0.272" (6.91 mm)  
NOMINAL JACKET THICKNESS: 0.030" (0.76 mm)

#### MESSENGER:

NOMINAL DIAMETER OF MESSENGER: 0.051" (1.30 mm)  
MINIMUM BREAKING STRENGTH: 180 lbs. (82 kg<sub>F</sub>)

#### ELECTRICAL PROPERTIES:

IMPEDANCE: 75.0 +/- 3.0 Ohms  
VELOCITY OF PROPAGATION: 85.0% NOMINAL  
ATTENUATION: @ 68°F (20°C)

Center Conductor


Dielectric

Bonded Laminated Aluminum Tape

Aluminum Braided Shield

Steel Messenger

Jacket

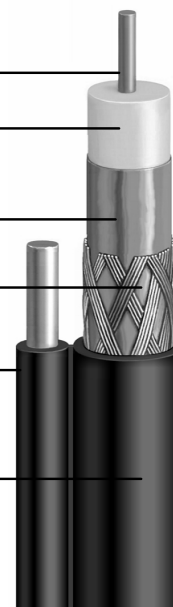

Shipping Weight (Lbs.)/1000': 44 lbs.

@ Frequency MHz	dB/100 ft. (MAX.)	dB/100 meters (MAX.)
5 MHz	0.58 dB	1.90 dB
55 MHz	1.60 dB	5.25 dB
83 MHz	1.95 dB	6.40 dB
187 MHz	2.85 dB	9.35 dB
211 MHz	3.05 dB	10.00 dB
250 MHz	3.30 dB	10.82 Db
300 MHz	3.55 dB	11.64 dB
350 MHz	3.85 dB	12.63 dB
400 MHz	4.15 dB	13.61 dB
450 MHz	4.40 dB	14.43 dB
500 MHz	4.66 dB	15.29 dB
550 MHz	4.90 dB	16.08 dB
600 MHz	5.10 dB	16.73 dB
750 MHz	5.65 dB	18.54 dB
865 MHz	6.10 dB	20.01 dB
1000 MHz	6.55 dB	21.49 dB

### QUALITY CABLE & ELECTRONICS, INC.

1780 N.W. 15<sup>th</sup> AVE., SUITE 400.....

POMPANO BEACH, FL 33069

TEL: (954) 978-8845 FAX: (954) 978-8831

WEB: [www.qce.cc](http://www.qce.cc) EMAIL: [Sales@qce.cc](mailto:Sales@qce.cc)