



Quality Cable & Electronics, Inc.

1780 N.W. 15th Avenue, Suite 400

Pompano Beach, FL 33069

Tel: (954) 978-8845 Fax: (954) 978-8831

Web: www.qce.cc Email: Sales@qce.cc

HDMI Cable Series

CG13006/CG13010/CG13012

CG13106/CG13110/CG13112

CG13006/CG13010/CG13012
CG13106/CG13110/CG13112





HDMI Cable, 1.3B, 30AWG, Gold Plating, Black PVC, ROHS, 6ft/10ft/12ft
HDMI Cable, 1.3B, 28AWG, Gold Plating, Black PVC, ROHS, 6ft/10ft/12ft

The Kable Power™ component High Definition Multimedia Interface (HDMI) cable is designed to be equal or superior to the highest quality cables on the market today. 100% quality testing and extraordinary attention to detail ensures superior performance today and in the future when relying on Otius cable products.

Characteristics:

- Complies with HDMI 1.3b standards for digital audio/ video and PC connectivity.
- Options of 28AWG, 30AWG, RoHS, with varies cable lengths cater for market needs.
- It has a soft flexible PVC jacket made from new, not recycled, material that will not deteriorate or crack over time.
- It has a PVC bonding knuckle to prevent the cables from splitting apart, a common problem for this type of design.
- Gold plating connectors provide better connectivity and resistance to oxidation over time, for more reliable operation. It supports superior connection and tension strength compared with more conventional designs.
- 95% pure copper braiding provides better isolations from unwanted interference, while greatly enhancing structural integrity and strength.
- Proper design guarantees super digital data transfer performance.
- From start to finish a superior product to the low quality "clones" offered in the marketplace that have dubious long term performance and operation.

You can rely on Kable Power™ for the best in cable accessories

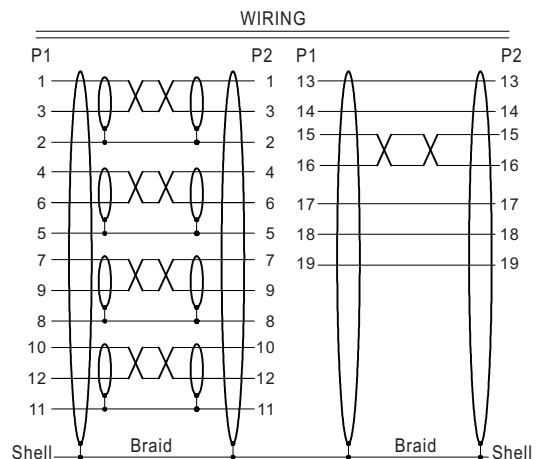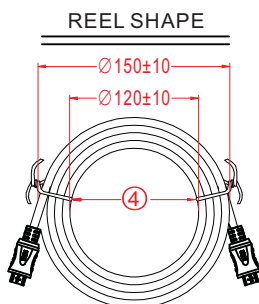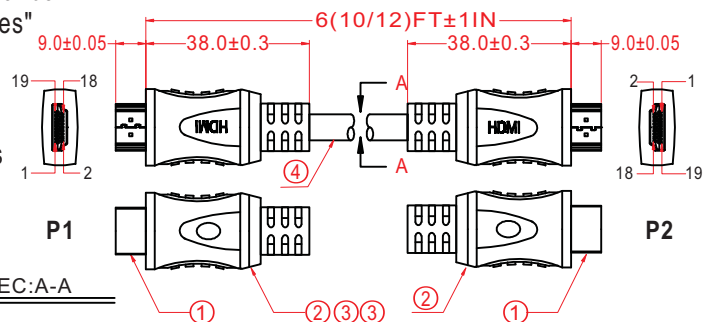

Material List

- ① HDMI/MALE: HDMI/MALE Sold Type the Pin Gold Plating, Black PBT, Shell Gold Plating.
- ② Molding: 45 degree PVC, Color : Black
- ③ Inner Mold: PE, Color:Transparent
- ④ Cable: {[28AWG(7/0.127mm Stranded Tinned Copper)+Drain(7/0.127mm Stranded Tinned Copper+AL-Foil)]*4P+[28AWG(7/0.127mm Stranded Tinned Copper)]*1P+[28AWG(7/0.127mm Stranded Tinned Copper)*5C]}+AL-Foil+Braid(24/7/0.12mm Tinned Copper), Jacket (OD: 7.3±0.2mm Black PVC)